



全漢企業股份有限公司

SPI Electronic Co., Ltd.

台灣桃園市建國東路 22 號  
TEL : 886-3-375-9888  
<http://www.fsp-group.com.tw>

No. 22, Jianguo E. Rd., Taoyuan City,  
Taiwan, R.O.C.  
FAX : 886-3-375-6966  
Email:sales@mail.fsp-group.com.tw

---

# SPECIFICATION



**ESD05000977**

Released Date:2005/1/10-13:7:52



全漢企業股份有限公司  
SPI Electronic Co.,Ltd.

台灣 桃園市建國東路 22 號  
NO.22, Jianguo E. Rd., Taoyuan City, Taiwan, R.O.C.  
TEL:+886-3-375-9888 FAX:+886-3-375-6966

# SPECIFICATION

## FSP700-80GLC

9PA7000100

**Main Feature:**  
**High Efficiency**  
**Active PFC Circuit**  
**Full Range Input**

**DEC 29,2004**  
**REV:01**



全漢企業股份有限公司  
SPI Electronic Co.,Ltd .

---

**MODEL: FSP700-80GLC**

**Revision History**

<u>Rev</u>	<u>Description</u>	<u>Date</u>	<u>Author</u>
1.0		2004/12/29	

## 1. GENERAL DESCRIPTION AND SCOPE

This is the specification of Model FSP700-80GLC; AC-line powered switching power supply with active PFC (Power Factor Correction) circuit, meet EN61000-3-2 and with Full Range Input features.

The specification below is intended to describe as detailedly as possible the functions and performance of the subject power supply. Any comment or additional requirements to this specification from our customers will be highly appreciated and treated as a new target for us to approach.

## 2. REFERENCE DOCUMENTS

The subject power supply will meet the EMI requirements and obtain main safety approvals as following:

### 2.1 EMI REGULATORY

- FCC Part 15 Subpart J, Class 'B' 115 Vac operation.
- CISPR 22 Class 'B' 230 Vac operation.

### 2.2 SAFETY

- NEMKO EN 60950
- TUV EN60950 OR VDE EN60950
- CSA-C22.2 NO. 60950
- IEC 60950
- UL 60950
- CE :
  - EN 55022:1998+A1: 2000, Class B
  - EN 61000-3-2: 2000
  - EN 61000-3-3: 1995+A1: 2001
- CISPR22: 1997+A1: 2000, Class B
- AS/NZS CISPR 22: 2002, Class B

### 3. INPUT ELECTRICAL SPECIFICATIONS

#### 3.1. AC INPUT

Parameter	Min.	Nom. <sup>(1)</sup>	Max.	Unit
V <sub>in</sub> (115VAC)	103.5	115	135	VAC <sub>rms</sub>
V <sub>in</sub> (230VAC)	180	230	265	VAC <sub>rms</sub>
V <sub>in</sub> Frequency	47	--	63	HZ

◆ Nominal voltages for test purposes are considered to be within ±1.0V of nominal.

#### 3.2. INRUSH CURRENT

(Cold start – 25 deg. C)

115V	No damage
230V	No damage

**Maximum inrush current from power-on (with power on at any point on the AC sine) and including, but not limited to, three line cycles, shall be limited to a level below the surge rating of the input line cord, AC switch if present, bridge rectifier, fuse, and EMI filter components. Repetitive ON/OFF cycling of the AC input voltage should not damage the power supply or cause the input fuse to blow.**

#### 3.3. INPUT LINE CURRENT

115V	10 Amps – rms maximum
230V	5.0Amps – rms maximum

#### 3.4. EFFICIENCY

##### 3.4.1 General

**Under the load conditions defined in Table 1 and Table 2. The loading condition for testing efficiency shown in Table 1 represents a fully loaded system, a ~ 50% (typical) loaded system, and a ~ 20% (light) loaded system**

**Table. 1 Loading Table for Efficiency Measurements**

700W(loading shown in Amps)								
Loading	5V	3.3V	12V1	12V2	12V3	12V4	-12V	+5Vsb
Full	10	10	15	15	10	10	0.8	2.0
Typical	5	5	7.5	7.5	5	5	0.4	1.0
Light	1	1	1	1	1	1	0	0

**Table 2. Minimum Efficiency Vs Load**

Loading	Full load	Typical load	Light load
115V Required Minimum Efficiency	78%	75%	70%
230V Required Minimum Efficiency	80%	75%	70%

3.5 MECHANICAL SPECIFICATIONS

The mechanical drawing of the subject power supply, which indicate the form factor, location of the mounting holes, location, the length of the connectors, and other physical specifications of the subject power supply. Please refer to the attachment drawing.

## 4.0. OUTPUT ELECTRICAL REQUIREMENTS

### 4.1 OUTPUT VOLTAGE AND CURRENT RATING

Output	MINIMUM LOAD	NORMAL LOAD	MAXIMUM LOAD	LOAD REG	LINE REG.	RIPPLE & NOISE
+3.3 V	1A	20A	36A	±5%	±1%	80mV P-P
+5 V	1A	15A	27A	±5%	±1%	80mV P-P
+12V1	1A	7.5A	15A	±5%	±1%	200mV P-P
+12V2	1A	7.5A	15A	±5%	±1%	200mV P-P
+12V3	1A	7.5A	15A	±5%	±1%	200mV P-P
+12V4	1A	7.5A	15A	±5%	±1%	200mV P-P
-12V	0.0A	0.4	0.8	±10%	±1%	200mV P-P
+5VSB	0.0A	1.0A	2.0 A	±5%	±1%	80mV P-P

- ( 1 ) +3.3V & 5V total output not exceed 155W.
- ( 2 ) total output current for this subject power supply is 70A
- ( 3 ) total output for this subject power supply is 700W watts
- ( 4 ) The maximum continuous power rating of supply is 700W at 35°C De rate 3W/°C from 35°C to 50°C

### 4.2. LOAD CAPACITY SPECIFICATIONS

The cross regulation defined as follows, the voltage regulation limits DC include DC Output ripple & noise.

LOAD	STM.	+3.3V	+5V	12V1	12V2	12V3	12V4	-12V	+5VSB
FULL LOAD	HHHHHHHH	10A	10A	10A	15A	10A	15A	0.8A	2A
FULL LOAD	HHHHHHHH	10A	10A	15A	10A	15A	10A	0.8A	2A
+3.3V MAX other MIN	HHHHHHLH	36A	4.6A	1A	1A	1A	1A	0A	2A
+5V MAX Other MIN	LHLLLLLL	1.5A	27A	6A	6A	6A	6A	0A	0A
+12VDC MAX Other MIN	LLHHHHLL	1A	3A	10A	15A	10A	15A	0A	0A
+12VDC MAX Other MIN	LLHHHHLL	1A	3A	15A	10A	15A	10A	0A	0A
-12VDC MAX Other MIN	LLLLLHL	1A	1A	1A	1A	1A	1A	0.8A	0A
+5VSB MAX other MIN	LLLLLLH	1A	1A	1A	1A	1A	1A	0A	2A
ALL MIN	LLLLLLLL	1A	1A	1A	1A	1A	1A	0A	0A

### 4.3. HOLD-UP TIME (@ 90% FULL LOAD)

115V / 60Hz : 17 mSec. Minimum.

230V / 50Hz : 17 mSec. Minimum.

The output voltage will remain within specification, in the event that the input power is removed or interrupted, for the duration of one cycle of the input frequency. The interruption may occur at any point in the AC voltage cycle. The power good signal shall remain high during this test.

### 4.4.OUTPUT RISE TIME

(10% TO 95% OF FINAL OUTPUT VALUE, @FULL LOAD)

115V-rms or 230V-rms + 5Vdc/3.3Vdc : 20ms Maximum

115V-rms or 230V-rms + 12Vdc : 20ms Maximum

115V-rms or 230V-rms + 5Vsb : 25ms Maximum

115V-rms or 230V-rms - 12Vdc : 20ms Maximum

### 4.5.OVER VOLTAGE PROTECTION

Voltage Source	Protection Point
+3.3V	3.76V-4.8V
+5V	5.6V-7.0V
12VDC	13.5V-15.6V

### 4.6.OVE-CURRENT PROTECTION

OUTPUT VOLTAGE	Max. overcurrent limit
+3.3V	55A
+5V	48A
12V1	20.5A
12V2	20.5A
12V3	20.5A
12V4	20.5A

#### 4.7.SHORT CIRCUIT PROTECTION

Output short circuit is defined to be a short circuit load of less than 0.1 ohm.

In the event of an output short circuit condition on +3.3V, +5V ,+12V1,+12V2,+12V3 or 12V4 output, the power supply will shutdown and latch off without damage to the power supply.The power. supply shall return to normal operation after the short circuit has been removed and the power switch has been turned off for no more than 2 seconds.

In the event of an output short circuit condition on -12V output, the power supply will not be damaged. The power supply shall return to normal operation as soon as the short circuit has been removed. and the power switch has been turned off for no more than 2 seconds.

#### 4.8. POWER SIGNAL

POWER GOOD @ 115/230V,FULL LOAD	100 –500mSec.
POWER FAIL @115/230V, FULL LOAD	1 mSec. minimum

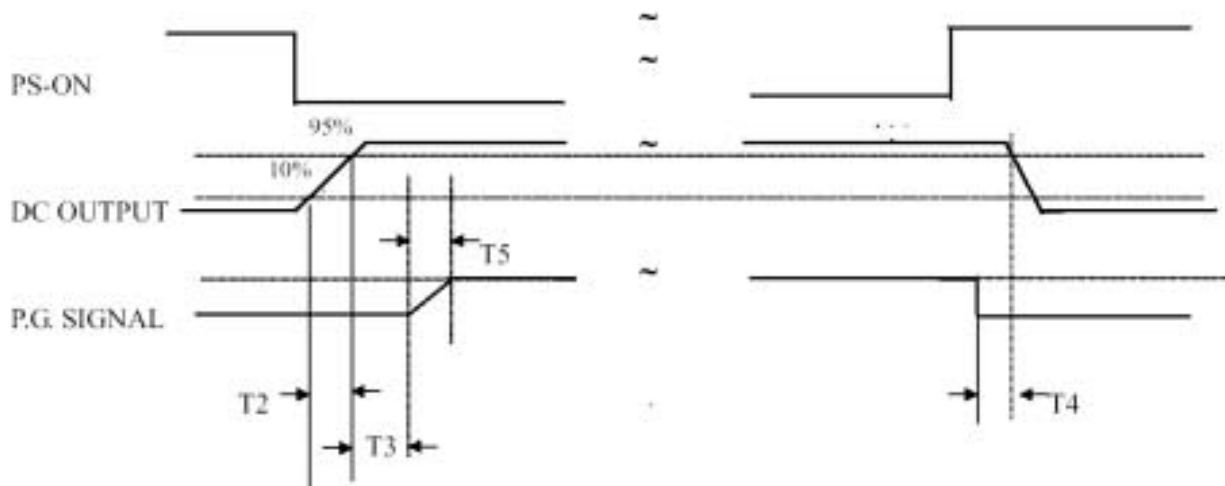


Figure 1

- T2 : RISETIME < 20mS
- T3 : POWER GOOD DELAY TIME 100mS-500mS
- T4 : POWER FAIL DELAY TIME > 1mS
- T5 : POWER GOOD RISETIME ≤ 10mS

#### 5.0 ENVIRONMENTAL REQUIREMENTS

The power supply will be compliant with each item in this specification for the following Environmental conditions.

5.1. TEMPERATURE RANGE

Operating	0 to +50 deg. C
Storage	-40 to +70 deg. C

6.2. HUMIDITY

Operating	5 –95% RH, Non-condensing
Storage	5 –95% RH, Non-condensing

5.3. VIBRATION

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Vibration Operating – Sine wave excited, 0.25 G maximum acceleration, 10-250 Hz swept at one octave / min. Fifteen minute dwell at all resonant points, where resonance is defined as those exciting frequencies at which the device under test experiences excursions two times large than non-resonant excursions.

Plane of vibration to be along three mutually perpendicular axes.

**6.0. LABELLING**

Label marking will be permanent, legible and complied with all agency requirements.

6.1. MODEL NUMBER LABEL

Labels will be affixed to the sides of the power supply showing the following:


- Manufacturer’s name and logo.
- Model no., serial no., revision level, location of manufacturer.
- The total power output and the maximum load for each output.
- AC input rating.

## 7. CONNECTOR PIN DESIGNATIONS

The pin designations and color codes are defined as follows:

	P1 SYSTEM BOARD		P2 DISK DRIVER		P4-P5, P7-P8 DISK DRIVER		P6 DISK DRIVER	
PIN1	+3.3V	ORANGE	+12V3	YELLOW	+12V3	YELLOW	+5V	RED
PIN2	+3.3V	ORANGE	COM	BLACK	COM	BLACK	COM	BLACK
PIN3	COM	BLACK	+5V	RED	COM	BLACK	COM	BLACK
PIN4	+5V	RED	COM	BLACK	+5V	RED	+12V3	YELLOW
PIN5	COM	BLACK	+3.3V	ORANGE				
PIN6	+5V	RED						
PIN7	COM	BLACK						
PIN8	PWR-OK	GRAY						
PIN9	+5VSB	PURPLE						
PIN10	+12V3	YELLOW						
PIN11	+12V3	YELLOW						
PIN12	+3.3V	ORANGE						
PIN13	+3.3V	ORANGE						
	3.3V sense	BROWN						
PIN14	-12V	BLUE						
PIN15	COM	BLACK						
PIN16	PS_ON	GREEN						
PIN17	COM	BLACK						
PIN18	COM	BLACK						
PIN19	COM	BLACK						
PIN20								
PIN21	+5V	RED						
PIN22	+5V	RED						
PIN23	+5V	RED						
PIN24	COM	BLACK						


	P3 SYSTEM BOARD			P4 SYSTEM BOARD			
PIN1	COM	BLACK	PIN1	COM	BLACK		
PIN2	COM	BLACK	PIN2	COM	BLACK		
PIN3	COM	BLACK	PIN3	COM	BLACK		
PIN4	+12V4	YELLOW/BLACK	PIN4	COM	BLACK		
PIN5	+12V4	YELLOW/BLACK	PIN5	+12V1	YELLOW/BLUE		
PIN6	+12V4	YELLOW/BLACK	PIN6	+12V1	YELLOW/BLUE		
			PIN7	+12V2	YELLOW/GREEN		
			PIN8	+12V2	YELLOW/GREEN		






Peripheral Power Connector



Floppy Drive Power Connector

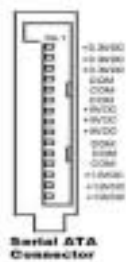

Serial ATA Connector

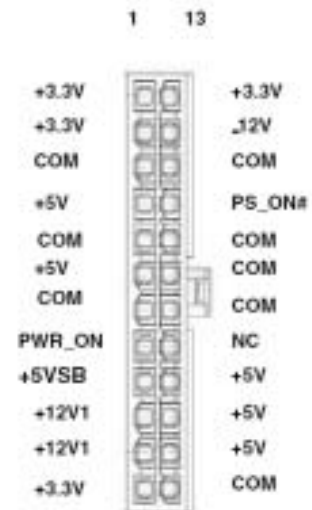

Main Power Connector