



全漢企業股份有限公司

電氣規格書

版次 : 12
 文件編號 : ESD04030565
 附件版本 : 02
 研發部門 : RD8
 作者 : ruijuo/卓瑞智
 Model No/Type : 9PA4001800(FSP400-60GLN,PC,ATX,S,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6 L2S,STD,INTEL,FULL RANGE)
 機密 : N
 發行日期 : 2005/4/25-10:58:7
 備註 :
 升版理由 : 增加機種關聯



單位	姓名	單位	姓名	單位	姓名
安規 1	Chow 周懿慧	主管	Tj 莊同榮		

相關料號：

9PA4001800

,FSP400-60GLN,PC,ATX,S,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),4L1S,STD,INTEL,FULL RANGE,RD8

9PA4001801 PILOT

RUN,FSP400-60GLN,(RMB1),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,INTEL,FULL RANGE,9PA4001800,RD8

9PA4001802

,FSP400-60GLN,(F061),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),4L1S,OEM,INTEL,FULL RANGE,9PA4001801,RD8

9PA4001805

,AO400-12ALN,(A271),PC,ATX,S,W/NK,W/IO,WO/O,WO/SS,AOPEN,W/PFC(A),5L1S,OEM,INTEL,FULL RANGE,9PA4001800,RD8

9PA4001806 ,,KEEP

不

使

用 ,FSP400-60GLN,(A551),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,OEM,,INTEL,FULL RANGE,9PA4001801,RD8,

9PA4001803

,FSP400-60GLN,(F221),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,OEM,INTEL,FULL RANGE,9PA4001801,RD8

9PA4001804 KEEP

不

生

產,FSP400-60GLN,(F041),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,OEM,INTEL,FULL RANGE,9PA4001801,RD8

9PA4001807

,FSP400-60GLN,(M221),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,OEM,INTEL,FULL RANGE,9PA4001802,RD8

9PA4001808

,AX440-60GLN,(RMB2),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,AMACROX,W/PFC(A),6L1S,OEM,INTEL,FULL RANGE,9PA4001801,RD8

9PA4001809

,,,FSP400-60GLN,(C151),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,OEM,,INTEL,FULL RANGE,9PA4001803,RD8,

9PA4001810

,AX440-60GLN,(F042),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,AMACROX,W/PFC(A),6L1S,OEM,INTEL,FULL RANGE,9PA4001808,RD8

9PA4001811

,FSP400-60GLN,(F062),PC,ATX,B,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,OEM,INTEL,FULL RANGE,9PA4001802,RD8

9PA4001812 ,,KEEP

不

使

用 ,AX440-60GLN,(F222),PC,ATX,RIFLE,W/NK,W/IO,WO/O,WO/SS,AMACROX,W/PFC(A),6L1S,OEM,,INTEL,FULL RANGE,9PA4001808,RD8,

台灣 桃園市建國東路 22 號

No. 22, Jianguo E. Rd., Taoyuan City, Taiwan, R.O.C.

TEL : +886-3-375-9888 FAX : +886-3-375-6966

9PA4001815

,FSP400-60GLN,(F223),PC,ATX,B,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,INTEL,
FULL RANGE,9PA4001803,RD8

9PA4001817

,FSP400-60GLN,(F043),PC,ATX,S,W/NK,W/IO,WO/O,WO/SS,FSP(F/S),W/PFC(A),4L1S,IN
TEL,FULL RANGE,9PA4001800,RD8

9PA4001819

,FSP400-60GLN,(O511),PC,ATX,RIFLB,W/NK,W/IO,WO/O,WO/SS,FSP,W/PFC(A),6L1S,O
EM,INTEL,FULL RANGE,9PA4001801,RD8

9PA4001818

,AO400-12ALN,(A272),PC,ATX,S,W/NK,W/IO,WO/O,WO/SS,AOPEN,W/PFC(A),5L1S,OE
M,INTEL,FULL RANGE,9PA4001805,RD8



全漢企業股份有限公司
SPI Electronic Co.,Ltd.

台灣 桃園市建國東路 22 號
NO.22, Jianguo E, Rd., Taoyuan City, Taiwan, R.O.C.
TEL: +886-3-375-9888 FAX: +886-3-375-6966

SPECIFICATION

FSP400-60GLN

9PA4001800

Main Feature:
Low Noise
High Efficiency
Active PFC Circuit
Full Range Input

April 6, 2005
REV:01

全漢企業股份有限公司
SPI Electronic Co.,Ltd.



MODEL: FSP400-60GLN

Revision History

<u>Rev</u>	<u>Description</u>	<u>Date</u>	<u>Author</u>
1.0		2005-04-06	

1. GENERAL DESCRIPTION AND SCOPE

This is the specification of Model FSP400-60GLN; AC-line powered switching power supply with active PFC (Power Factor Correction) circuit, meet EN61000-3-2 and with Full Range Input features.

The specification below is intended to describe as detailedly as possible the functions and performance of the subject power supply. Any comment or additional requirements to this specification from our customers will be highly appreciated and treated as a new target for us to approach.

2. REFERENCE DOCUMENTS

The subject power supply will meet the EMI requirements and obtain main safety approvals as following:

2.1 EMI REGULATORY

- FCC Part 15 Subpart J, Class 'B' 115 Vac operation.
- CISPR 22 Class 'B' 230 Vac operation.

2.2 SAFETY

- NEMKO EN 60950
- TUV EN60950 OR VDE EN60950
- CSA-C22.2 NO. 950-95
- IEC 60950
- UL 60950
- CE :
 - EN 55022:1998+A1: 2000, Class B
 - EN 61000-3-2: 2000
 - EN 61000-3-3: 1995+A1: 2001
- CISPR22: 1997+A1: 2000, Class B
- AS/NZS CISPR 22: 2002, Class B

3. INPUT ELECTRICAL SPECIFICATIONS

3.1. AC INPUT

Parameter	Min.	Nom. ⁽¹⁾	Max.	Unit
V _{in} (115VAC)	90	115	135	VAC _{rms}
V _{in} (230VAC)	180	230	265	VAC _{rms}
V _{in} Frequency	47	--	63	HZ

◆ Nominal voltages for test purposes are considered to be within ±1.0V of nominal.

3.2. INRUSH CURRENT

(Cold start – 25 deg. C)

115V	No damage
230V	No damage

Maximum inrush current from power-on (with power on at any point on the AC sine) and including, but not limited to, three line cycles, shall be limited to a level below the surge rating of the input line cord, AC switch if present, bridge rectifier, fuse, and EMI filter components. Repetitive ON/OFF cycling of the AC input voltage should not damage the power supply or cause the input fuse to blow.

3.3. INPUT LINE CURRENT

115V	5.0Amps – rms maximum
230V	2.5Amps – rms maximum

3.4. EFFICIENCY

3.4.1 General

Under the load conditions defined in Table 1 and Table 2. The loading condition for testing efficiency shown in Table 1 represents a fully loaded system. a ~ 50% (typical) loaded system. and a ~ 20% (light) loaded system.

Table. 1 Loading Table for Efficiency Measurements

400W(loading shown in Amps)						
Loading	+12V1	+12V2	+5V	+3.3V	-12V	+5Vsb
Full	12.0	14.0	9.0	11.0	0.3	1.0
Typical	5.0	9.0	3.0	5.0	0.1	1.0
Light	3.0	3.0	1.0	3.0	0.0	1.0

Table 2. Minimum Efficiency Vs Load

Loading	Voltage	Full load	Typical load	Light load
Required Minimum Efficiency	115V	75%	75%	70%
Required Minimum Efficiency	230V	80%	80%	75%

3.5 MECHANICAL SPECIFICATIONS

The mechanical drawing of the subject power supply, which indicate the form factor, location of the mounting holes, location, the length of the connectors, and other physical specifications of the subject power supply. Please refer to the attachment drawing.

4.0. OUTPUT ELECTRICAL REQUIREMENTS

4.1 OUTPUT VOLTAGE AND CURRENT RATING

Output	MINIMUM LOAD	NORMAL LOAD	MAXIMUM LOAD	LOAD REG	LINE REG	RIPPLE&NOISE
+3.3V	0.5A	15A	30A	±5%	±1%	50mV P-P
+5V	0.3A	15A	30A	±5%	±1%	50mV P-P
+12V1	1.0A	7A	14 A	±5%	±1%	120mV P-P
+12V2	1.0A	7.5A	15A	±5%	±1%	120mV P-P
-12V	0.0A	0.25A	0.5A	±10%	±1%	120mV P-P
+5VSB	0.0A	1.0A	2.0 A	±5%	±1%	50mV P-P

- (1) +3.3V & +5V total output not exceed 152W.
- (2) +3.3V & +5V & +12V1 & +12V2 total output not exceed 380W
- (3) total output for this subject power supply is 400 watts

4.2. LOAD CAPACITY SPECIFICATIONS

The cross regulation defined as follows, the voltage regulation limits DC include DC Output ripple & noise.

LOAD	STM.	+3.3V	+5V	+12V1 DC	+12V2 DC	-12V	+5VSB
FULL LOAD	LHHMHH	0.5A	30A	14A	5.3A	0.5A	2A
FULL LOAD	HMMHHH	30A	10.6A	4.3A	15A	0.5A	2A
+3.3V MAX other MIN	HLLLLL	30A	0.3A	1A	1A	0A	0A
+5V MAX Other MIN	LHLLLL	0.5A	21A	1A	1A	0A	0A
+12V1&+12V2 MAX Other MIN	LLHHLL	0.5 A	2.0A	14A	15A	0A	0A
-12V MAX other MIN	LLLLHL	0.5A	0.3A	1A	1A	0.5A	0A
+5VSB MAX other MIN	LLLLLH	0.5A	0.3A	1A	1A	0A	2A
ALL MIN	LLLLLL	0.5A	0.3 A	1A	1A	0A	0A

4.3. HOLD-UP TIME (@FULL LOAD)

115V / 60Hz : 17 mSec. Minimum.

230V / 50Hz : 17 mSec. Minimum.

The output voltage will remain within specification, in the event that the input power is removed or interrupted, for the duration of one cycle of the input frequency. The interruption may occur at any point in the AC voltage cycle. The power good signal shall remain high during this test.

4.4. OUTPUT RISE TIME

(10% TO 95% OF FINAL OUTPUT VALUE, @FULL LOAD)

115V-rms or 230V-rms

- + 3.3Vdc : 20ms Maximum
- + 5Vdc : 20ms Maximum
- + 12Vdc : 20ms Maximum
- + 5Vsb : 25ms Maximum
- 12Vdc : 20ms Maximum

4.5.OVER VOLTAGE PROTECTION

Voltage Source	Protection Point
+3.3V	3.76V-4.8V
+5V	5.6V-7.0V
+12V	13.0V-15.6V

4.6.OVER-CURRENT PROTECTION

OUTPUT VOLTAGE	Max. overcurrent limit
+3.3V	50.0A
+5V	48.0A
+12V1 DC	20.5A
+12V2 DC	20.5A

4.7.SHORT CIRCUIT PROTECTION

Output short circuit is defined to be a short circuit load of less than 0.1 ohm.

In the event of an output short circuit condition on +3.3V, +5V or +12V output, the power supply will shutdown and latch off without damage to the power supply. The power supply shall return to normal operation after the short circuit has been removed and the power switch has been turned off for no more than 2 seconds.

In the event of an output short circuit condition on -12V output, the power supply will not be damaged. The power supply shall return to normal operation as soon as the short circuit has been removed. and the power switch has been turned off for no more than 2 seconds.

4.8. POWER SIGNAL

POWER GOOD @ 115/230V,FULL LOAD	100 –500mSec.
POWER FAIL @115/230V, FULL LOAD	1 mSec. minimum

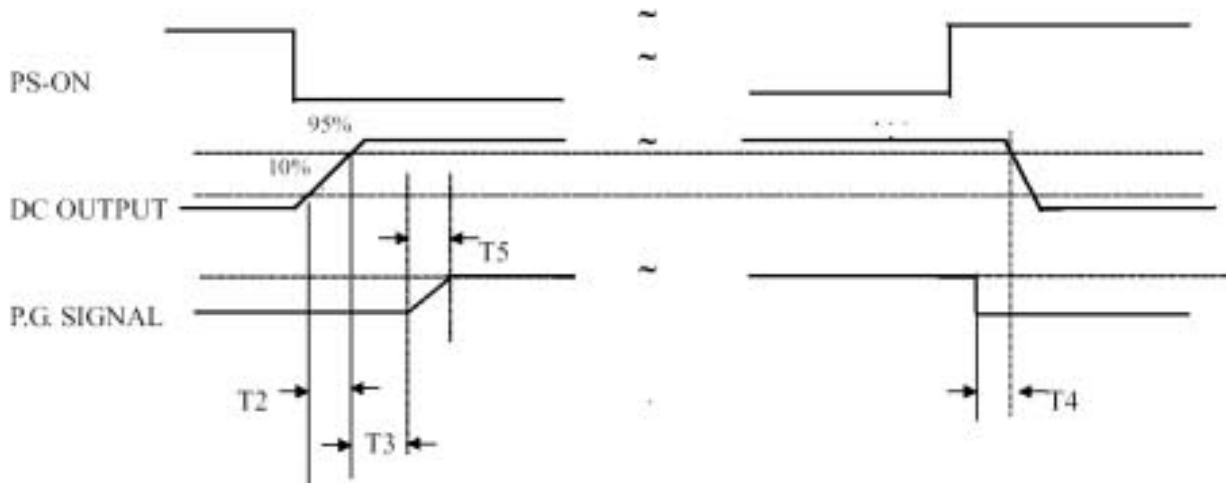


Figure 1

- T2 : RISE TIME < 20mS
- T3 : POWER GOOD DELAY TIME 100mS-500mS
- T4 : POWER FAIL DELAY TIME > 1mS
- T5 : POWER GOOD RISE TIME \leq 10mS

5.0 FAN NOISE REQUIREMENTS

5.1. The subject power supply is cooled by a self-contained, 120mm, 12VDC fan.

5.2. FAN NOISE

AC INPUT	FULL (Table.1)	TYPICAL (Table.1)	LIGHT (Table.1)
115V	NOISE \leq 35dB	NOISE \leq 25dB	NOISE \leq 22dB
230V	NOISE \leq 35dB	NOISE \leq 25dB	NOISE \leq 22dB

6.0 ENVIRONMENTAL REQUIREMENTS

The power supply will be compliant with each item in this specification for the following Environmental conditions.

6.1. TEMPERATURE RANGE

Operating	0 to +50 deg. C
Storage	-20 to +80 deg. C

6.2. HUMIDITY

Operating	5 -95% RH, Non-condensing
Storage	5 -95% RH, Non-condensing

6.3. VIBRATION

The subject power supply will withstand the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

Vibration Operating – Sine wave excited, 0.25 G maximum acceleration, 10-250 Hz swept at one octave / min. Fifteen minute dwell at all resonant points, where resonance is defined as those exciting frequencies at which the device under test experiences excursions two times large than non-resonant excursions.

Plane of vibration to be along three mutually perpendicular axes.

6.4 GROUND LEAKAGE CURRENT

The power supply ground leakage current shall be less than 3.5 mA.

6.5 RELIABILITY

The power supply reliability, when calculated by MIL-HDBK-217; latest revision, are exceed 100,000 hours with all output at maximum load and an ambient temperature of 25°C.

6.6 DIELECTRIC STRENGTH

Primary to Frame Ground : 1800 Vac for 1 sec.

Primary to Secondary : 1800Vac for 1 sec

6.7 INSULATION RESISTANCE

Primary to Frame Ground : 20 Meg.ohms Minimum

Primary to Secondary : 20 Meg.ohms Minimum

