SPI Electronic Co., Ltd.

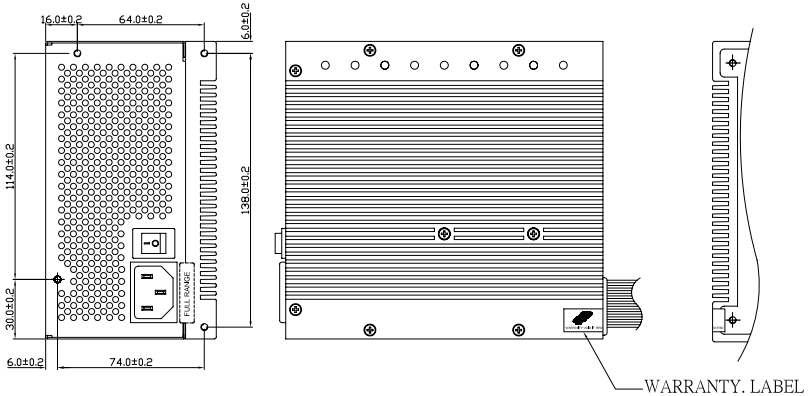


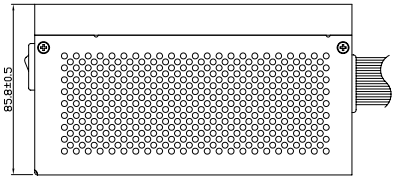


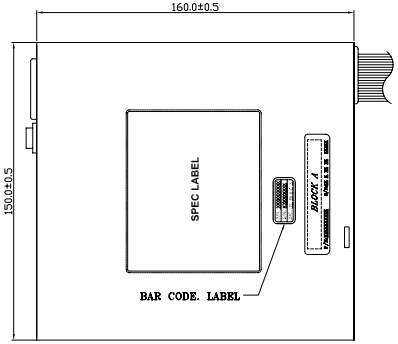


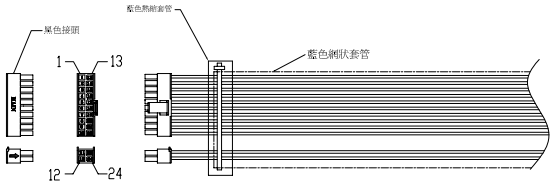


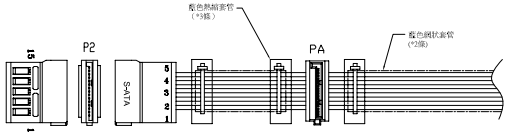


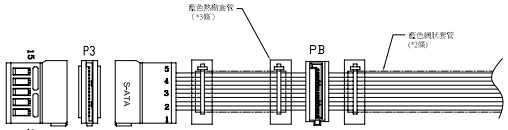




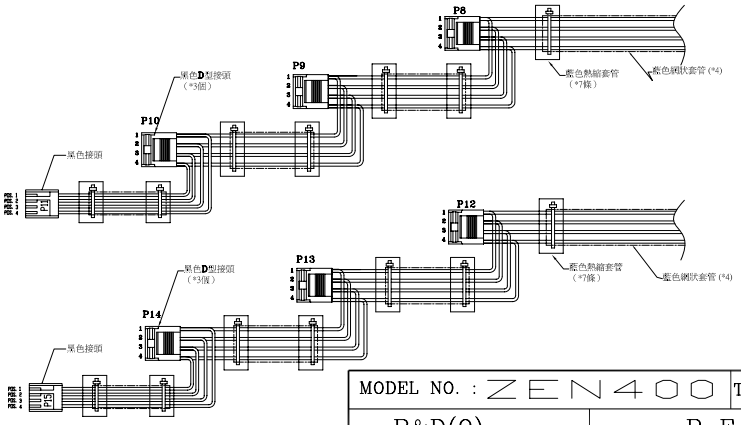


NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. *產地標籤依業務指示加貼.*

CSAE顏色為藍色(PANTONE NO.BLUE MG07-084)

SCALE:

UNIT: mm

| REF. ID. | PIN NO. | SIGNAL | WIRE COLOR | GAUGE | CONNECTOR TYPE | CABLE LENGTH |
|---|---|---|---|---|---|---|
| MAIN | 1 | +3.3VDC | ORANGE | 18 | H756-20N(LT) +H756-04N(LT) or EQUIV. | 400 $^{+20}_{-10}$ mm |
| | 2 | +3.3VDC | ORANGE | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5VDC | RED | 18 | | |
| | 5 | COM | BLACK | 18 | | |
| | 6 | +5VDC | RED | 18 | | |
| | 7 | COM | BLACK | 18 | | |
| | 8 | PWR_ON | GRAY | 24 | | |
| | 9 | +5Vsb | PURPLE | 16 | | |
| | 10 | +12V3 | YELLOW | 18 | | |
| | 11 | +12V3 | YELLOW | 18 | | |
| | 12 | +3.3VDC | ORANGE | 18 | | |
| | 13 | +3.3VDC | ORANGE | 18 | | |
| | | +3.3VSense | BROWN | 24 | | |
| | 14 | -12VDC | BLUE | 24 | | |
| | 15 | COM | BLACK | 18 | | |
| | 16 | PS_ON# | GREEN | 24 | | |
| | 17 | COM | BLACK | 18 | | |
| | 18 | COM | BLACK | 18 | | |
| | 19 | COM | BLACK | 18 | | |
| | 20 | | | | | |
| | 21 | +5VDC | RED | 18 | | |
| | 22 | +5VDC | RED | 18 | | |
| | 23 | +5VDC | RED | 18 | | |
| | 24 | COM | BLACK | 18 | | |
| PA PB | 1 | +12V1 | YELLOW | 18 | MOLEX CL1271HS0 15P or EQUIV. | 400 $^{+20}_{-10}$ mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | +5V | RED | 18 | | |
| | 4 | COM | BLACK | 18 | | |
| | 5 | +3.3V | ORANGE | 18 | | |
| P2 P3 | 1 | +12V1 | YELLOW | 18 | MOLEX CL1271HS0 15P or EQUIV. | 150 ±10mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | +5V | RED | 18 | | |
| | 4 | COM | BLACK | 18 | | |
| | 5 | +3.3V | ORANGE | 18 | | |
| PP | 1 | COM | BLACK | 18 | MOLEX 39-01-2040 or EQUIV. | 400 $^{+20}_{-10}$ mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | +12V2 | YEL/BLK | 18 | | |
| | 4 | +12V2 | YEL/BLK | 18 | | |
| P8 P12 | 1 | +12V1 | YELLOW | 18 | or EQUIV. 弋石廠商:P01001 | 400 $^{+20}_{-10}$ mm |
| | 2 | COM | BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5V | RED | 18 | | |
| P9 P13 | 1 | +12V1 | YELLOW | 20 | 弋石廠商:P01001 | 150±10mm |
| | 2 | COM | BLACK | 20 | | |
| | 3 | COM | BLACK | 20 | | |
| | 4 | +5V | RED | 20 | | |
| P10 P14 | 1 | +12V1 | YELLOW | 20 | 弋石廠商:P01001 | 150±10mm |
| | 2 | COM | BLACK | 20 | | |
| | 3 | COM | BLACK | 20 | | |
| | 4 | +5V | RED | 20 | | |
| P11 P15 | 1 | +5V | RED | 20 | MOLEX 171822-4 or EQUIV. | 150±10mm |
| | 2 | COM | BLACK | 20 | | |
| | 3 | COM | BLACK | 20 | | |
| | 4 | +12V1 | YELLOW | 20 | | |
| P4 | 1 | +12V1 | YELLOW | 18 | MOLEX 455590002 or EQUIV. | 450 $^{+20}_{-10}$ mm |
| | 2 | +12V1 | YELLOW | 18 | | |
| | 3 | +12V1 | YELLOW | 18 | | |
| | 4 | COM | BLACK | 18 | | |
| | 5 | COM | BLACK | 18 | | |
| | 6 | COM | BLACK | 18 | | |

P/N.:9PA4004200

| | | | |
|---|---|---|---|
| MODEL NO. : ZEN400 | TITLE: 外觀圖 | | SHEET: 1 OF 3 REV:00 |
| R&D(9) | P E | DRAWN | DATE |
| | | | 2006/12/20 |
| INTERIOR COUNTERSIGN: | | | 呼志明 |